

Key features:

- ❑ 24Vdc
- ❑ Test switch facility
- ❑ CE Approved
- ❑ RoHS Compliant
- ❑ EN1155:1997+A1:2002



SR09738
DEF-0501F-1B




SR09739
DEF-0501F-1D




SR09740
DEF-0501F-1F

Dimensions (mm):

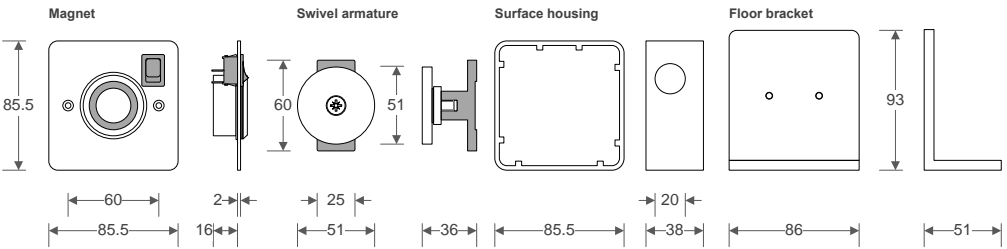

Projections (mm):

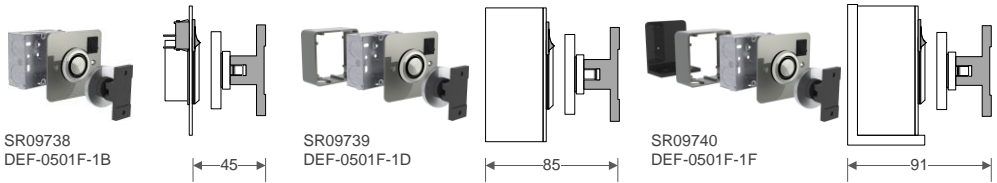

Specification:

Voltage V : 24Vdc
 Current draw mA: 88
 Holding force: 11kgs / 110 Newtons

Ordering information:

- SR09738 24Vdc Hold open magnet, SSS, c/w swivel armature (flush mount)
- SR09739 24Vdc Hold open magnet, SSS, c/w swivel armature (surface mount – simulated SSS)
- SR09740 24Vdc Hold open magnet, SSS, c/w swivel armature (floor mount – black powder coat / simulated SSS)