




952.528UK

2 WAY CEILING SPEAKER

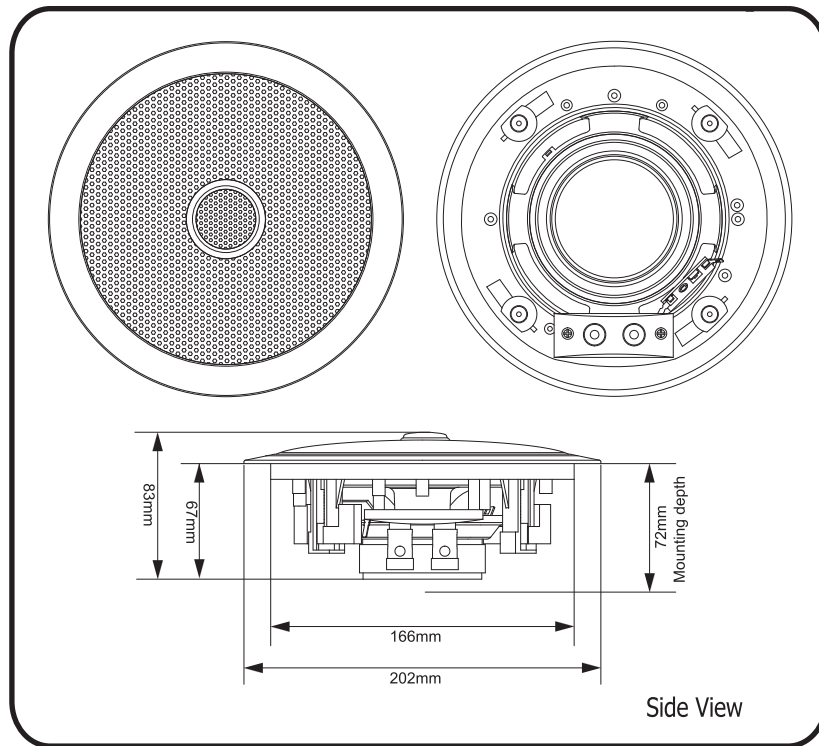

www.avsl-adastra.com

952.528UK

Technical Specifications

Rated power	40 Watts RMS
Driver impedance	8 Ohms
Effective frequency range (BS6840)	85-20 KHz
S.P.L@1m, 1watt, dB, Test Signal Bandwidth 100Hz - 10KHz	84 Hz
S.P.L@ Full power Octave Bandwidth	85 dB(± 2 dB)
Acoustic Power (dB, PWL@1 watt) 1k/2kHz	80/80 dB
Overall diameter	Φ202mm
Net weight	0.85 Kgs
Colour/Finish	White
Material	Plastic Baffle ABS with UV inhibitors Metal Driver Chassis & Grille
Mounting Depth	72mm
Cut-out	Φ166mm

