

# PCB TERMINAL BLOCKS

## 7.62mm Pitch Standard Profile Rising Clamp Terminal Blocks

PCB  
TERMINAL  
BLOCKS

INTER-  
CONNECTION

FUSES &  
FUSE-  
HOLDERS

LEDs &  
INDICATORS

MINIATURE  
SWITCHES

LIMIT &  
SAFETY  
SWITCHES

CONTROL  
PRODUCTS

INTERFACE  
MODULES &  
SUPPORTS


RELAY  
BASES

DIN RAIL  
ENCLOSURES

BATTERIES

SOLAR  
PANELS

TRANS-  
FORMERS

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.2-4.0mm<sup>2</sup> (30-12AWG) solid cable
- 0.2-2.5mm<sup>2</sup> (30-12AWG) stranded cable
- Guided pin alignment
-  approved


CTB0118



TYPE NO.	POLES	LENGTH
CTB0118/2	2	15.2mm
CTB0118/3	3	22.9mm
CTB0118/4	4	30.5mm
CTB0118/5	5	38.1mm
CTB0118/6	6	45.7mm
CTB0118/7	7	53.3mm
CTB0118/8	8	61mm
CTB0118/9	9	68.6mm
CTB0118/10	10	76.2mm
CTB0118/11	11	83.8mm
CTB0118/12	12	91.4mm

### SPECIFICATION

Rating	24A/500V
	UL=14A/300V, VDE&IMQ=24A/750V
Dielectric strength	≥3kV
Impulse withstand voltage	6kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Tinned, nickel plated brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.5mm

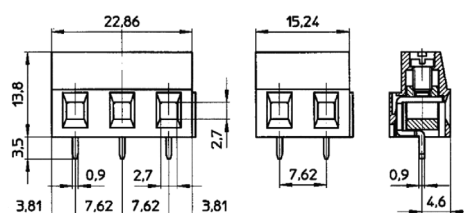

CAMDENBOSS

We operate a constant improvement policy, our products are subject to change without notice.

Ver 1.1

+44 (0)1638 716101  
info@camdenboss.com  
www.camdenboss.com



FM 28614 EMS 613558